

NEW



Dial Test Indicators

► with increased measuring range


■ **K 30/4** ■ **K 40/4** ► rd. 0,01 mm / rg. 4,0 mm

Technical Data:

Features:	K 30/4	K 40/4
Reading	0,01 mm	0,01 mm
Range	4 mm	4 mm
Dial reading	0 – 100	0 – 100
Bezel-Ø	28,4 mm	38,2 mm
Form to DIN 2270	A	A
Accuracy according to	manufacturing standard	manufacturing standard
Length of contact point with tungsten carbide ball Ø 2 mm	38 mm	38 mm
Swivelling range of contact point	240°	240°

Schematic figure:

K 30/4
K 40/4

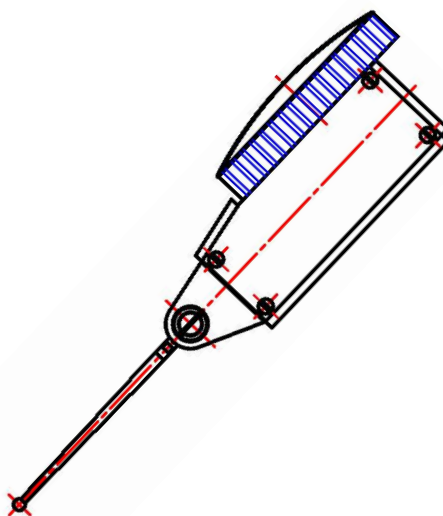

Käfer Messuhrenfabrik GmbH & Co. KG
Hahnstr. 11
DE-78054 Villingen-Schwenningen

Tel.: + 49 (0) 7720 / 83 41 – 0
Fax.: + 49 (0) 7720 / 2 18 68
--- Germany ---

info@kaefer-messuhren.de
www.kaefer-messuhren.de